


WH30- II Hand pallet truck

Liftstar hand pallet truck with 2500KGS capacity, offers users with a simple, economic and reliable handling equipment. Hydraulic pump passed the strict test, convenient design for repair or maintenance, chassis is with high strength and durable.

WH series can offer options with scale and galvanization.

- With integrated hydraulic pump, entry/exit rollers provide smooth pallet access and increase productivity.
- Ergonomic handle to provide comfortable and efficient operation.
- Solid frame and reinforced fork ensure high reliability.
- Standard Nylon wheel, optional PU wheel and rubber wheel are available.

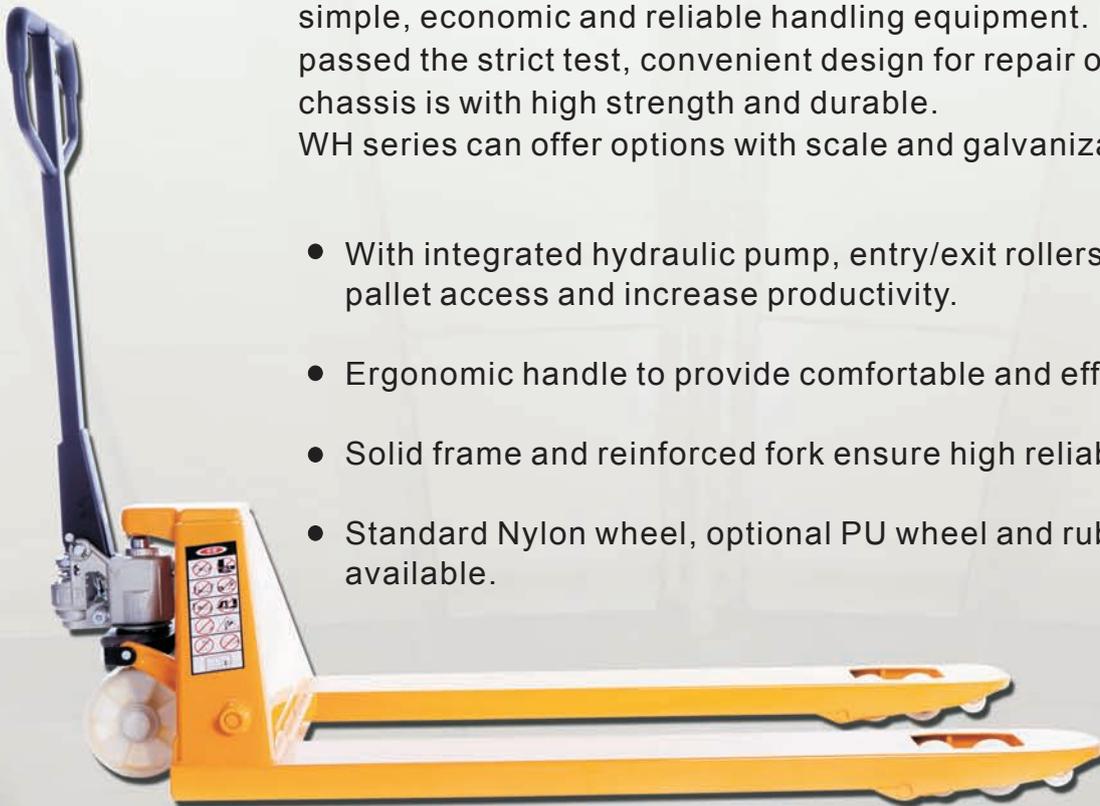

WH30- II Hand pallet truck

Specification Data

Feature			Model		WH30-II
	1.1	Q	capacity	kg	2500
	1.2		pump type		Intergrated

Dimensions	2.1	H ₁	lifting height	mm	115
	2.2	H	max. fork lifting height	mm	190/200
	2.3	H ₂	Lowered height of fork	mm	75/85
	2.4	B ₁	fork outside distance	mm	520/540/685
	2.5	L	fork length	mm	915/1100/1150/1200
	2.6	S	fork width	mm	160

Wheel	3.1		wheel(drive/load) Type		PU/Nylon/Rubber
	3.2	D1	size of steering wheel	mm	∅ 180*50
	3.3	D2	size of Loading wheel(single wheel)	mm	∅ 74*93
	3.4	D2	size of Loading wheel(double wheel)	mm	∅ 74*70

Right reserved for technical changes and improvements.



WH30- III Hand pallet truck

Liftstar hand pallet truck, with 2500KGS capacity, offers users with a simple, economic and reliable handling equipment. Hydraulic pump passed the strict test, convenient design for repair or maintenance, chassis is with high strength and durable.

WH series can offer options with scale and galvanization.

- With welding hydraulic pump, guild bracket provide smooth pallet access and increase productivity.
- Ergonomic handle to provide comfortable and efficient operation.
- Solid frame and reinforced fork ensure high reliability.
- Standard Nylon wheel, optional PU wheel and rubber wheel are available.



WH30- III Hand pallet truck

Specification Data

Feature			Model		WH30-III
	1.1	Q	capacity	kg	2500
	1.2		pump type		Welded

Dimensions	2.1	H ₁	lifting height	mm	115
	2.2	H	Max. fork lifting height	mm	200
	2.3	H ₂	Lowered height of fork	mm	85
	2.4	B ₁	fork outside distance	mm	520/550/685
	2.5	L	fork length	mm	915/1100/1150/1200
	2.6	S	fork width	mm	150

Wheel	3.1		wheel(drive/load) Type		PU/Nylon/Rubber
	3.2	D1	size of steering wheel	mm	∅ 180*50
	3.3	D2	size of Loading wheel(single wheel)	mm	∅ 80*84
	3.4	D2	size of Loading wheel(double wheel)	mm	∅ 80*60

Right reserved for technical changes and improvements.

